
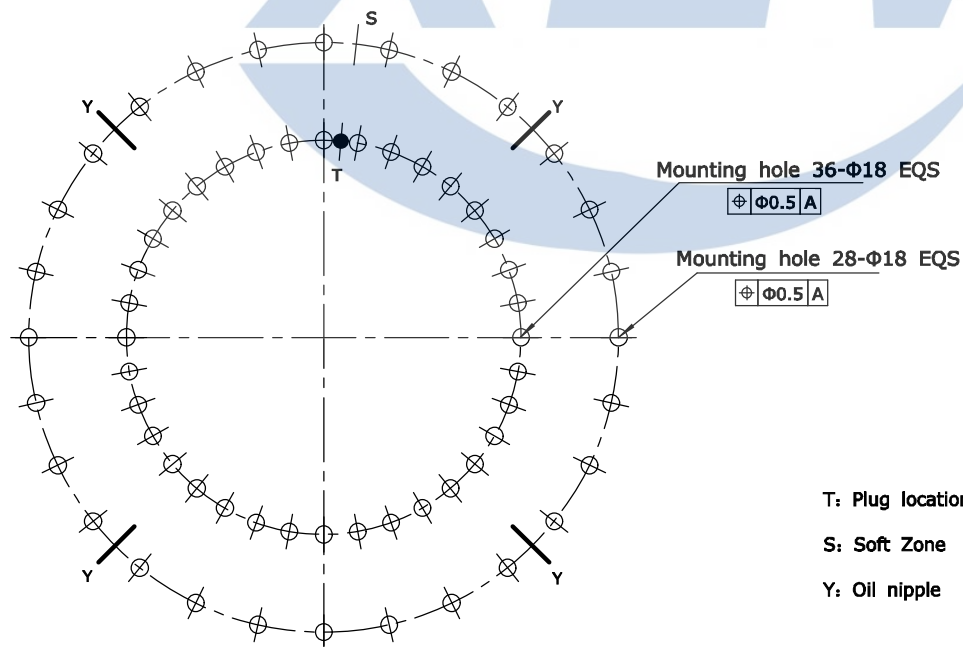


U.O.N ∇ 6.3

Notes:


1. Unspecified chamfer: $1.0 \times 45^\circ$
Through hole chamfer: $1.0 \times 45^\circ$
Edges chamfer
2. Raceway of inner & outer ring induction hardened. hardness: 55~62HRC
Depth: $\geq 3.0\text{mm}$
3. Inner & outer ring quenched & tempered, hardness: 207~262HB
4. Radial clearance: 0.15~0.40 mm
Axial clearance: 0.15~0.40 mm

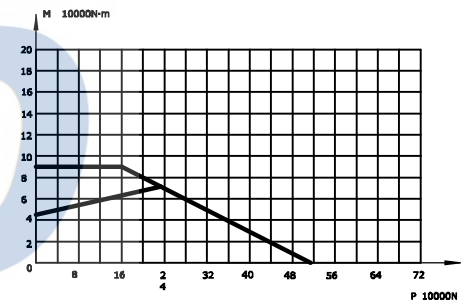

T: Plug location

S: Soft Zone

Y: Oil nipple

08	HG/T2811	Seals	NBRI-3	W17	2	
07	GB117-76	Pin	CN45	$\Phi 5 \times 45$	1	
06		Plug	CN45	$\Phi 25$	1	
05	JB/T7940.7	Oil nipple	Component	M8x1	4	
04	GB/T699	Inner ring	50Mn		1	
03	GB/T308-2002	Ball	GCr15	19.844	109 \pm 1	
02	HG/T2349	Spacer	Nylon	D20	109 \pm 1	
01	GB/T699	Outer ring	50Mn		1	
No.	Standard	Component	Material	Model	Qty	Remark
			Model	WD-230.20.0844	Drawing	Weight 47.1kg
			Name	Slewing Bearing	Qty	Scale
			Material	50Mn	Total 1 page	the 1st page
Design	Standard	 XUZHOU WANDA SLEWING BEARING CO.,LTD Tel: +86 516 83309366 Fax: +86 516 83915766 http://www.slew-bearing.com				
Check						
Process	Approve					
Date						